

FIG. 1

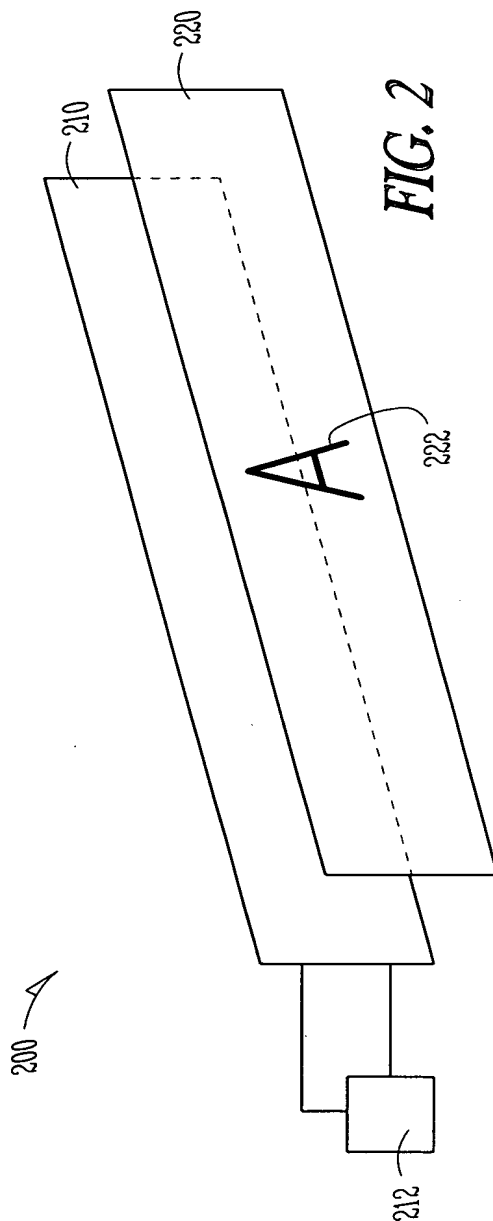


FIG. 2

2/12

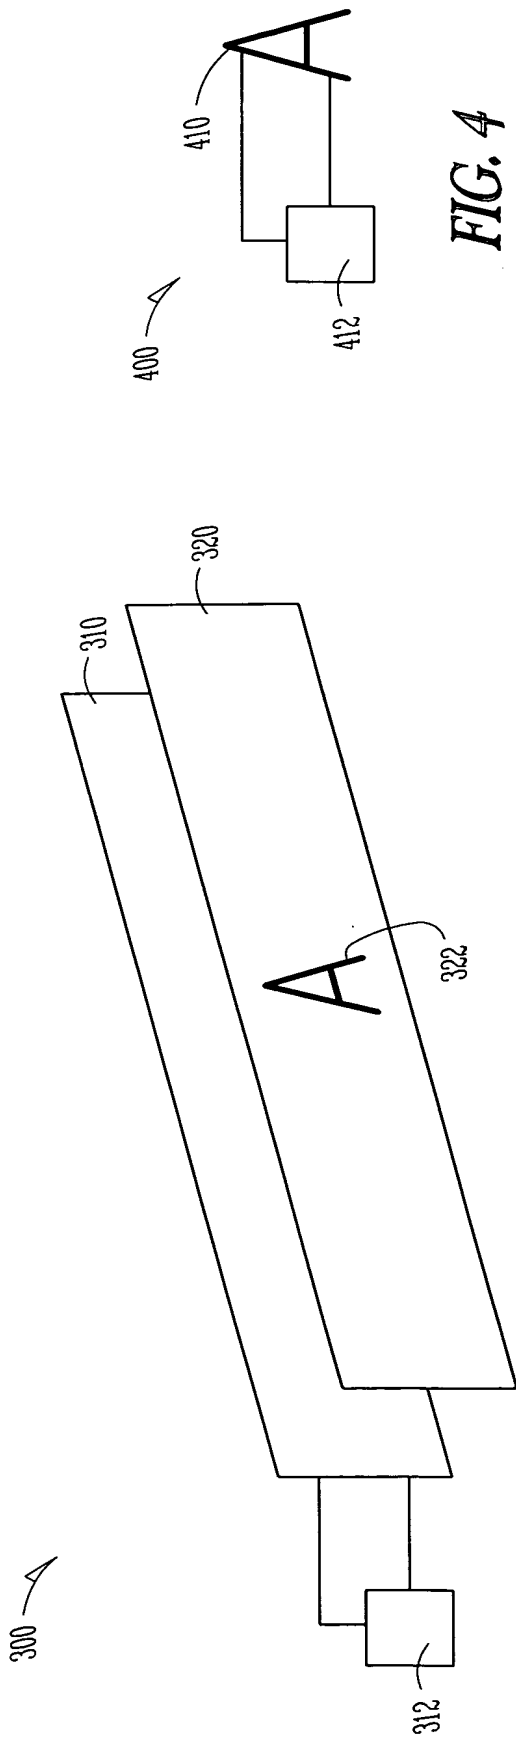


FIG. 4

FIG. 3





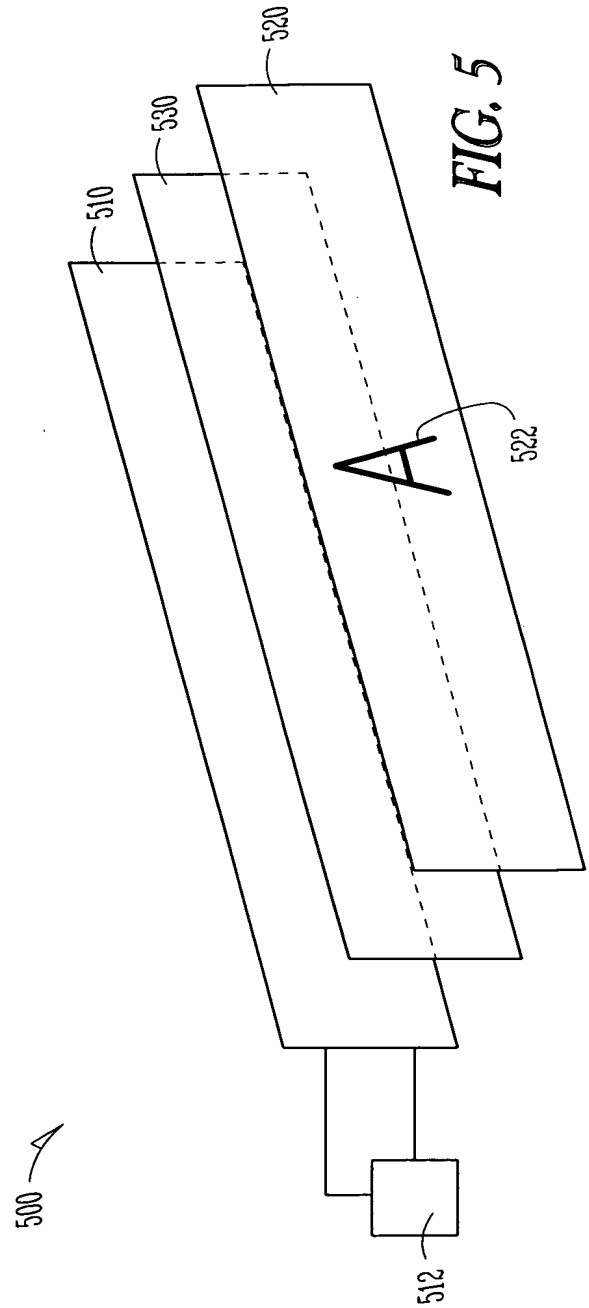


FIG. 5

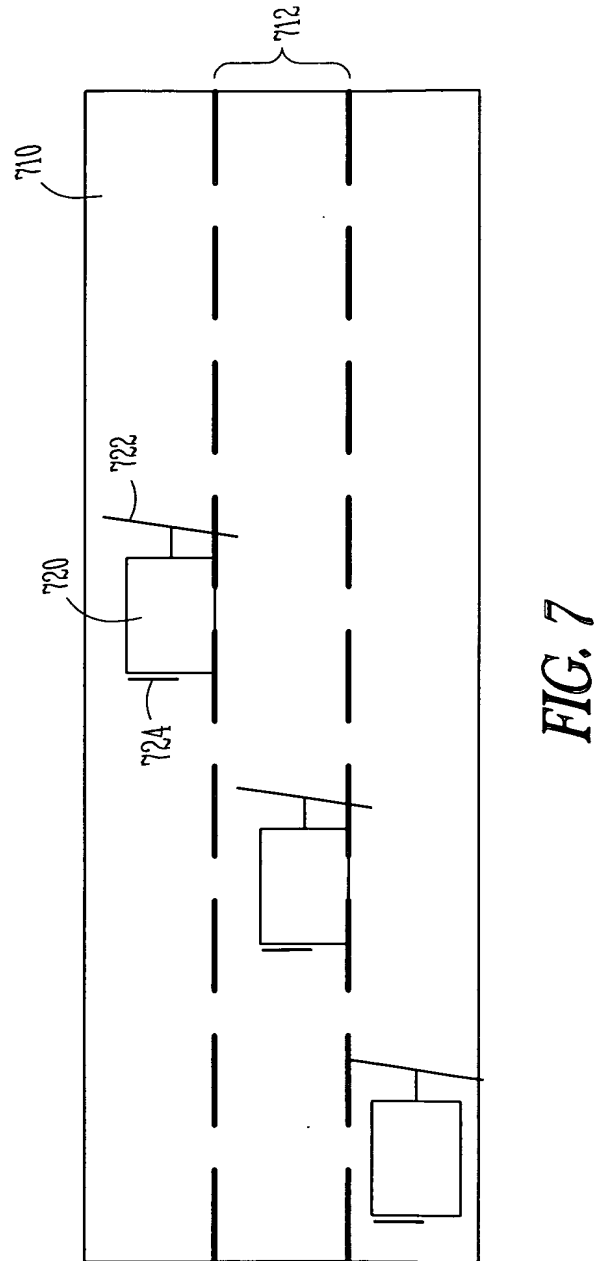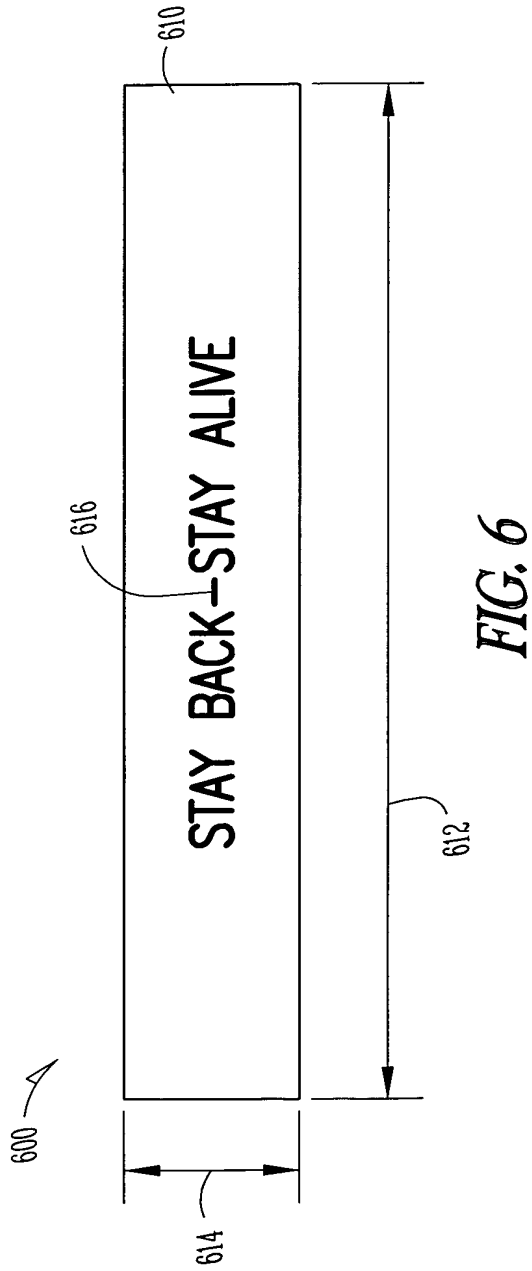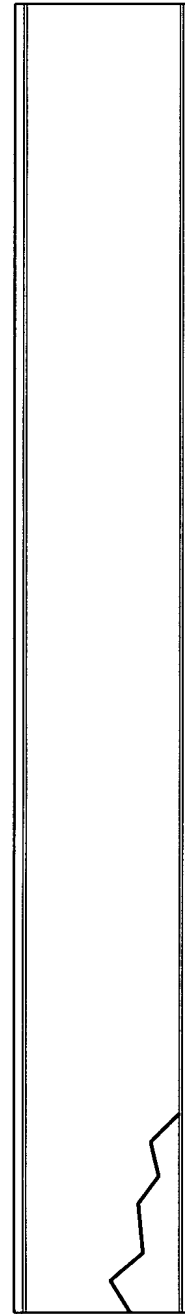

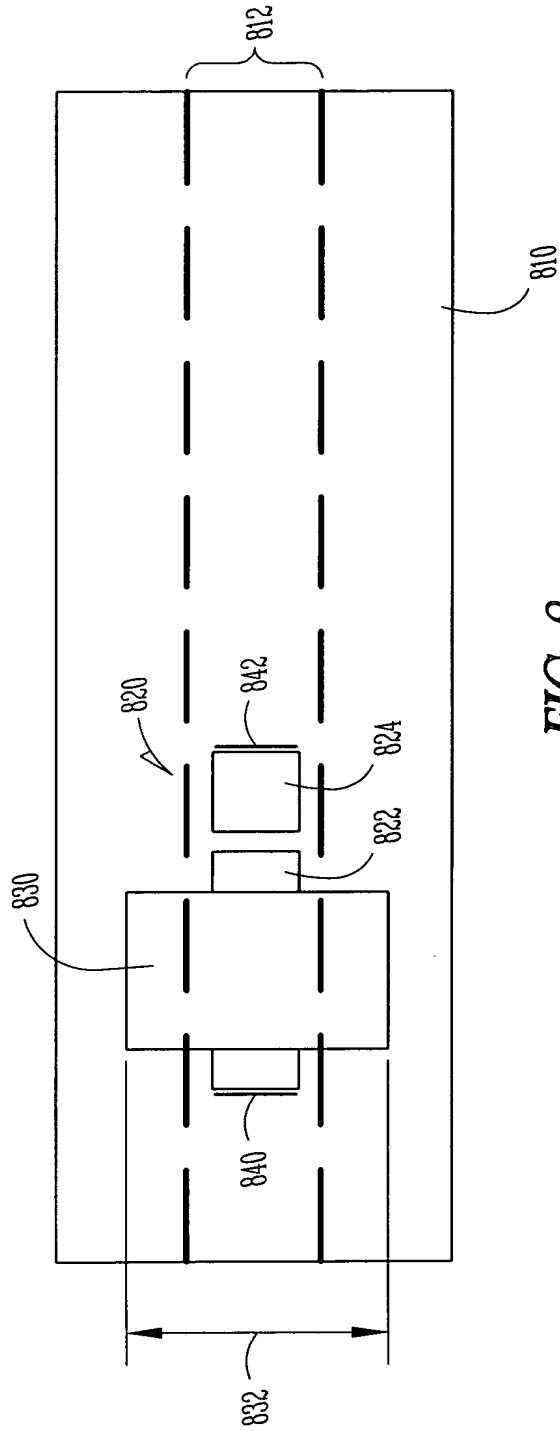

Stay Back Stay Alive Sign

Lamp Baseline Assumptions:

|                            |  |
|----------------------------|--|
| • Lamp Size:               | 8.5" x 72"   |
| • Construction:            | Hybrid   |
| • Lit Color:               | Yellow has a yellow on/off color                                 |
| • Interconnection:         | Crimp with Wires   |
| • ITO Substrate Thickness: | 0.007" (0.178mm)   |
| • Nominal Lamp Thickness:  | 0.015" (0.38mm)  |
| • Part Label:              | On packaging   |
| • Adhesive:                | None   |
| • Insulator:               | 0.0015" tape (a thicker laminate may be required for durability) |
| • Overprint:               | TBD  |

Power Supply Specs

|        |  |
|--------|--|
| Driver | 2-Amp or 5-Amp driver<br>(120V <sub>rm</sub> /60Hz input »<br>140V <sub>rms</sub> /600Hz output) |
|--------|--|

*FIG. 10*

6/12

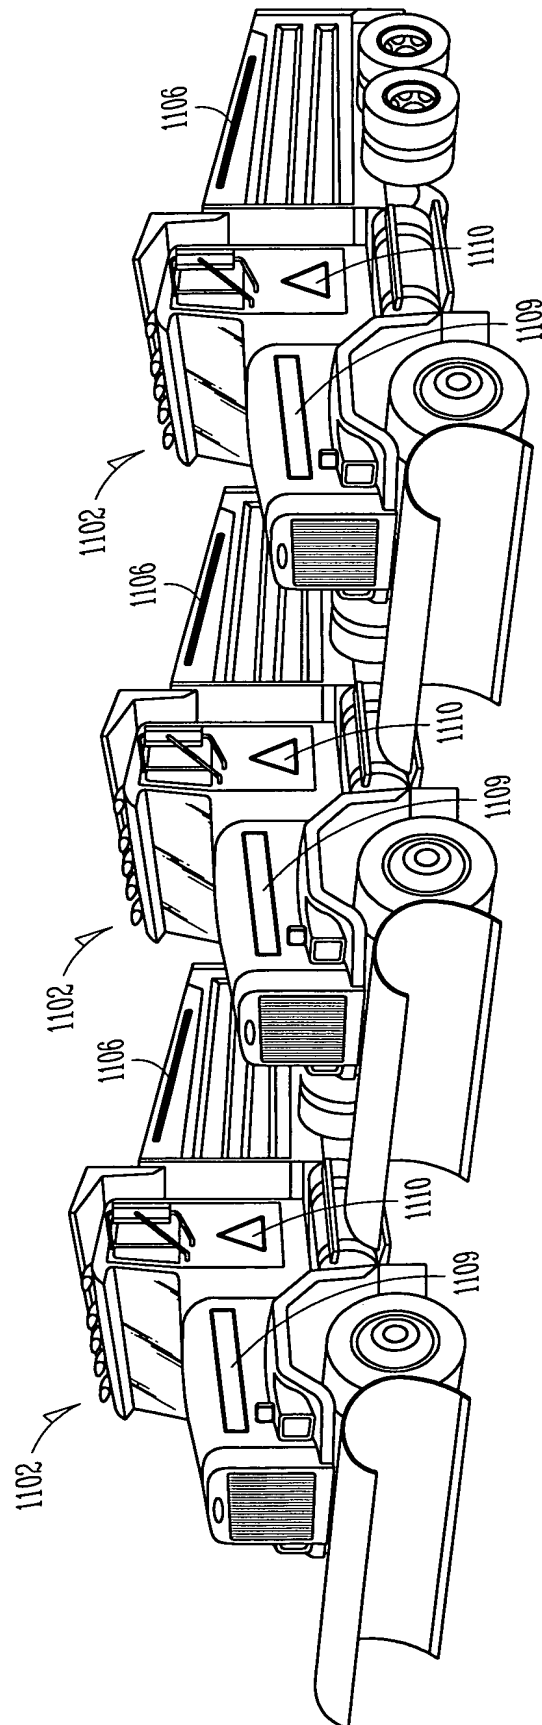
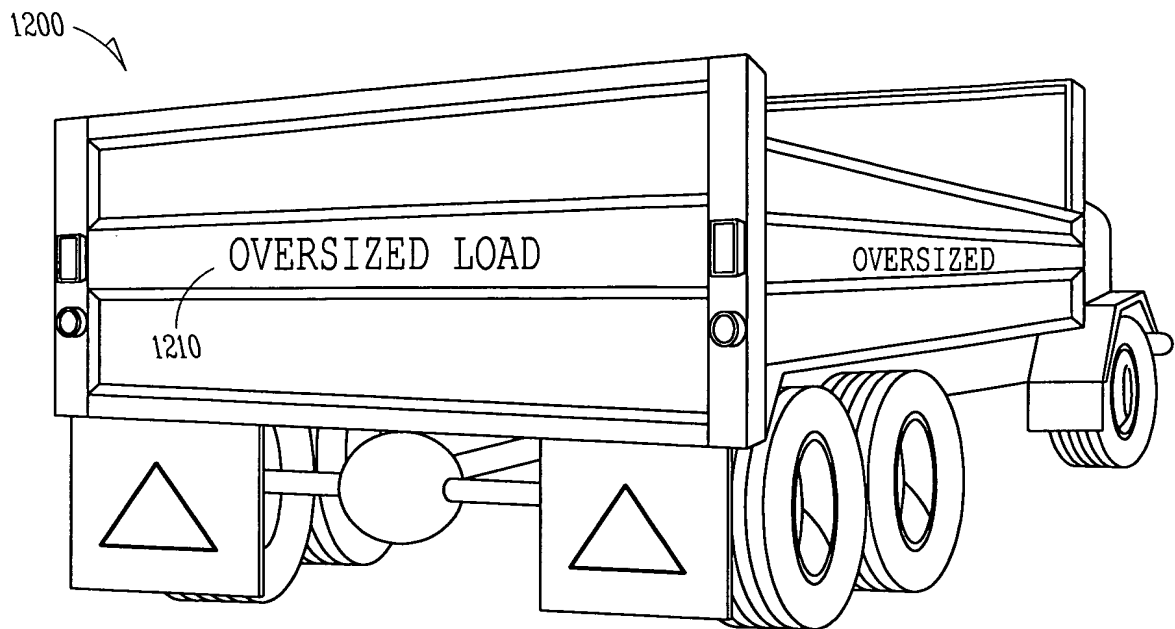
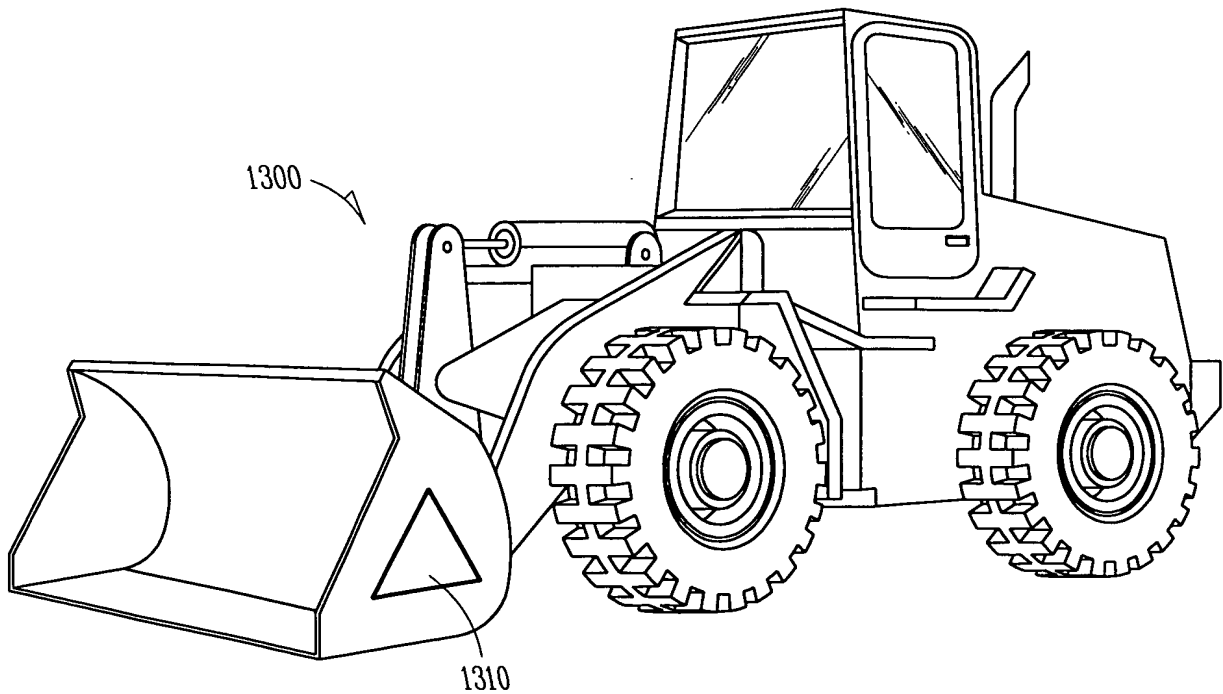


FIG. 11

7/12



*FIG. 12*



*FIG. 13*

8/12

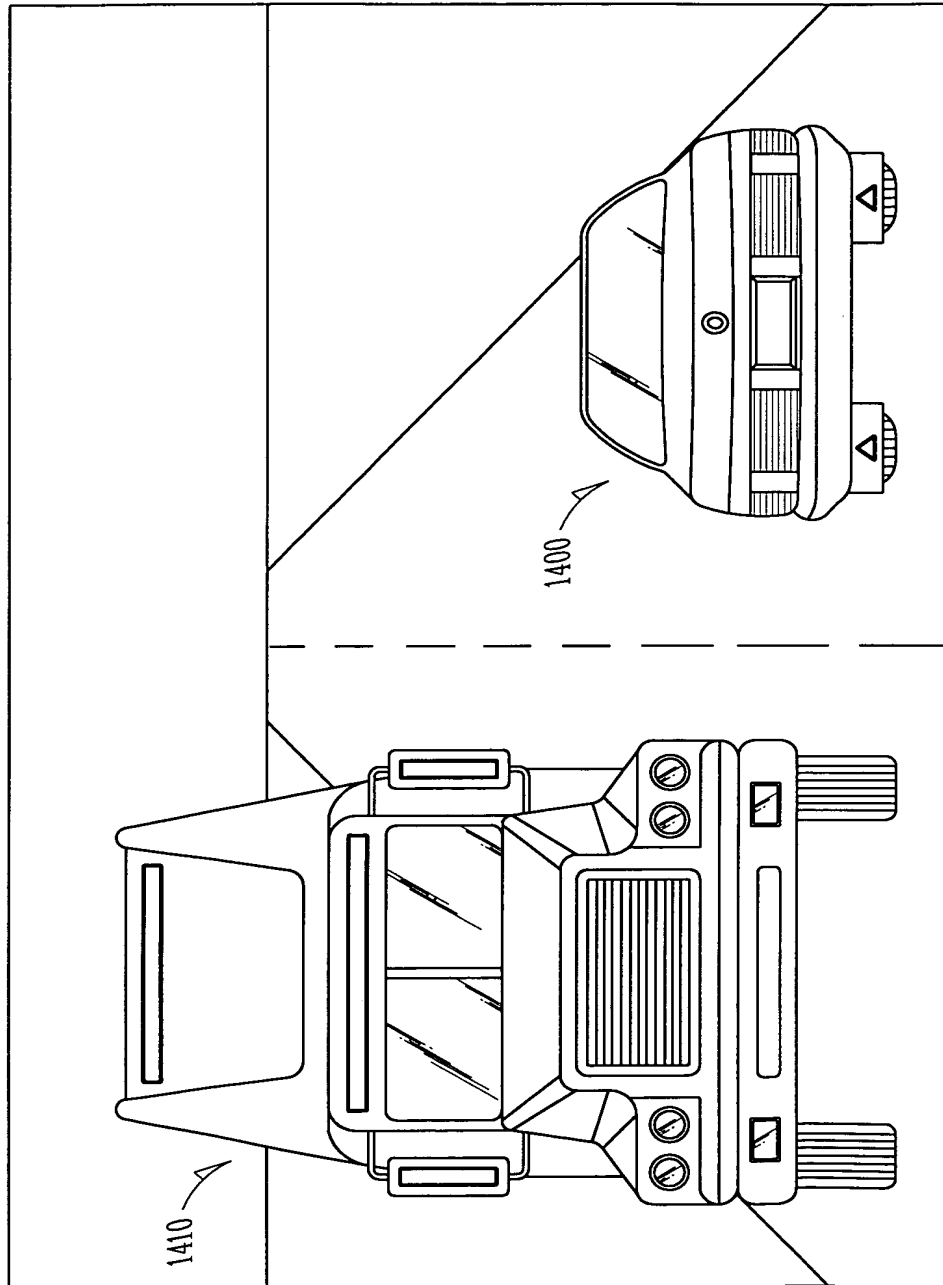


FIG. 14



9/12

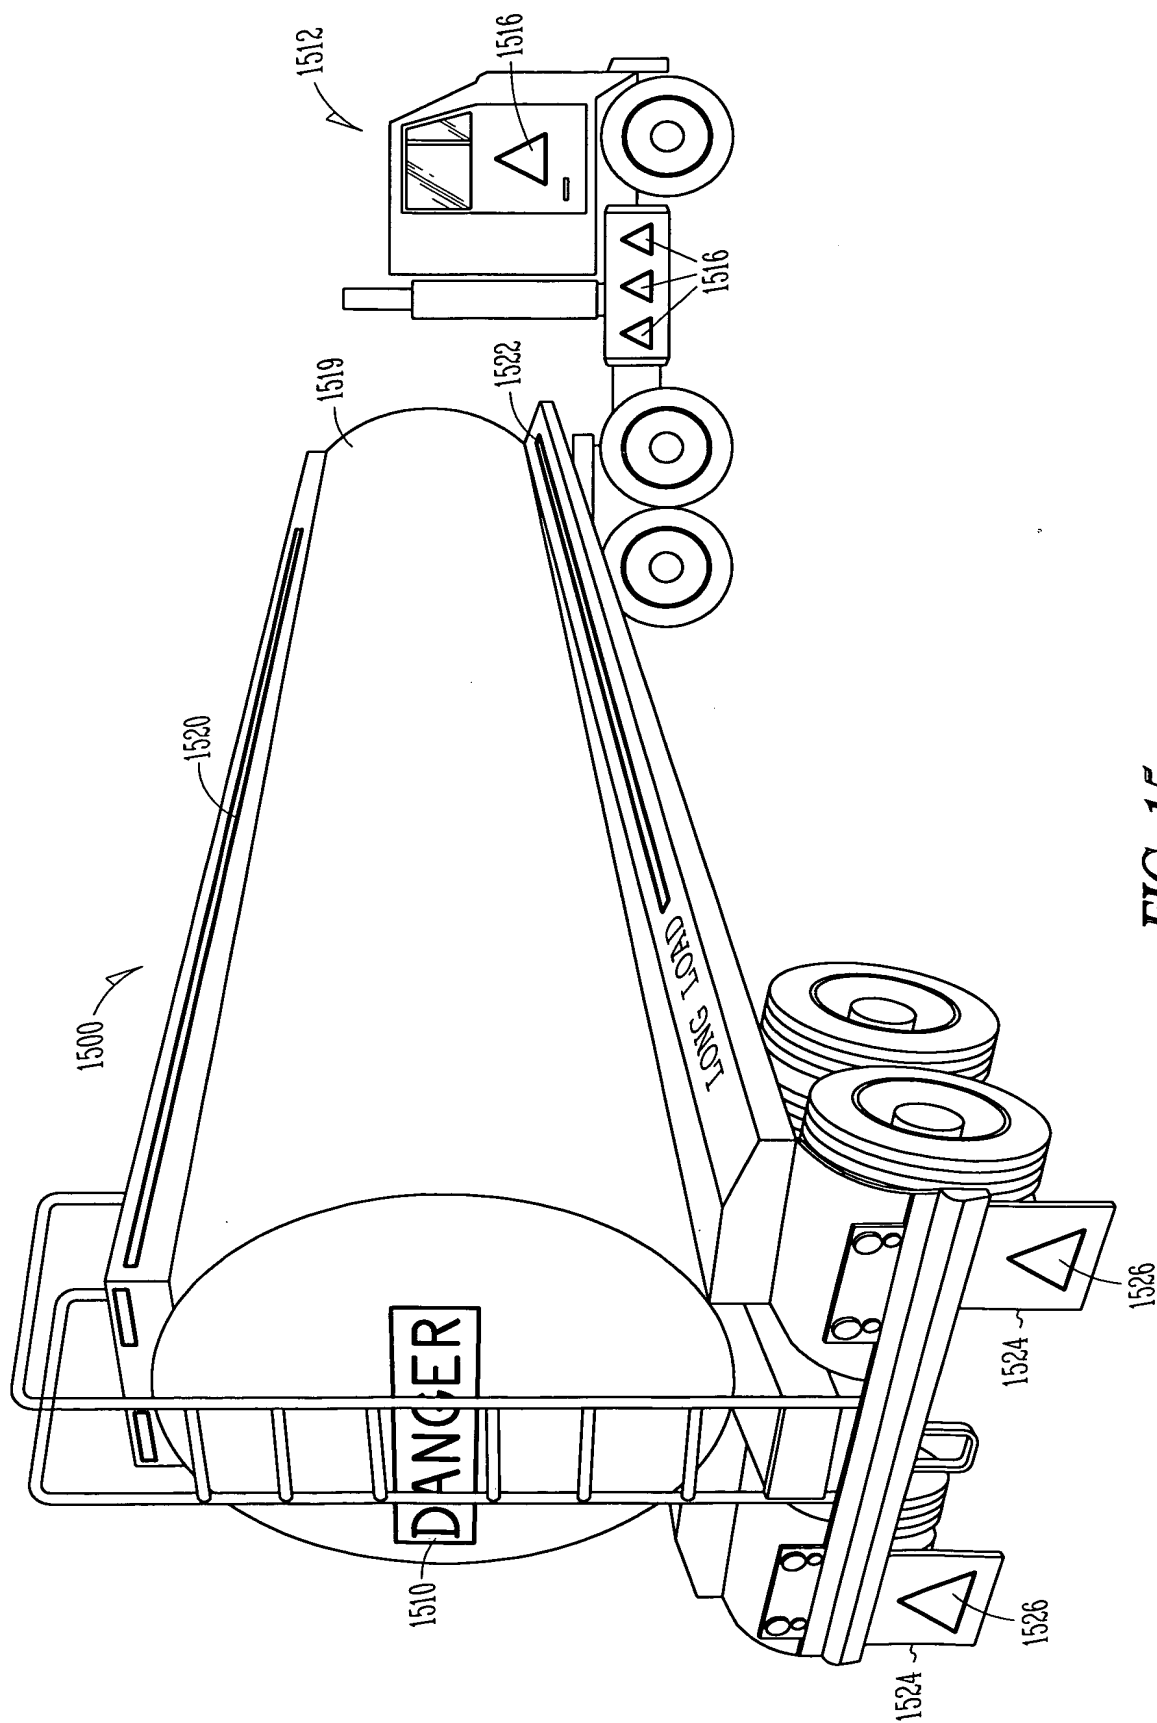
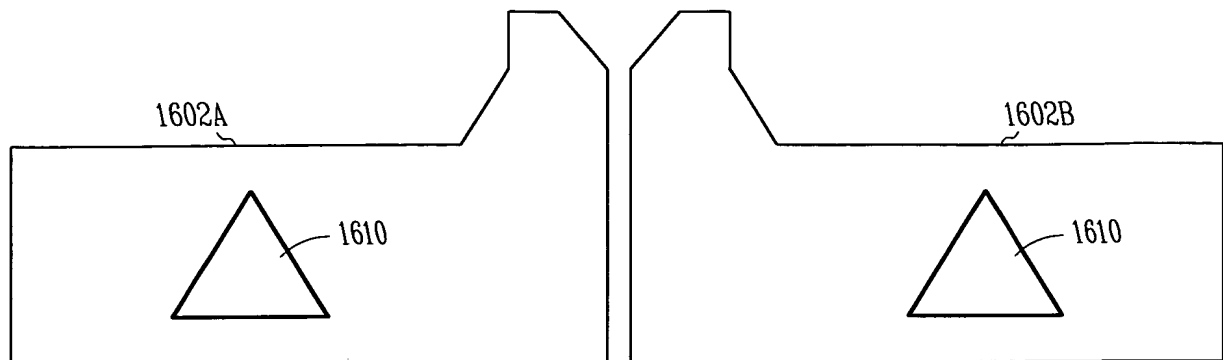
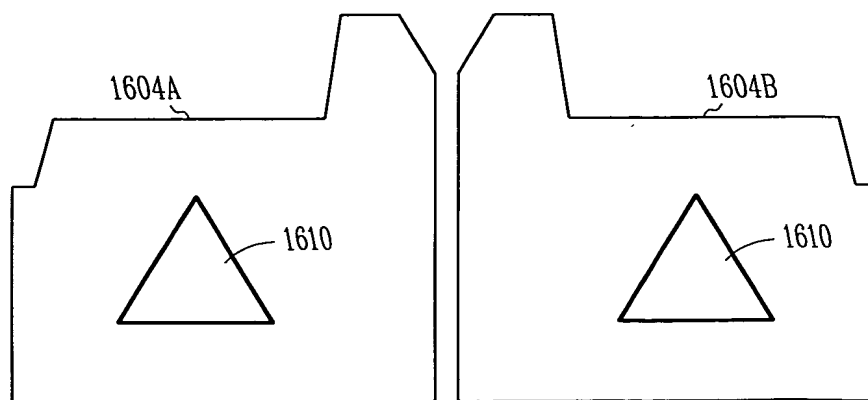


FIG. 15

10/12

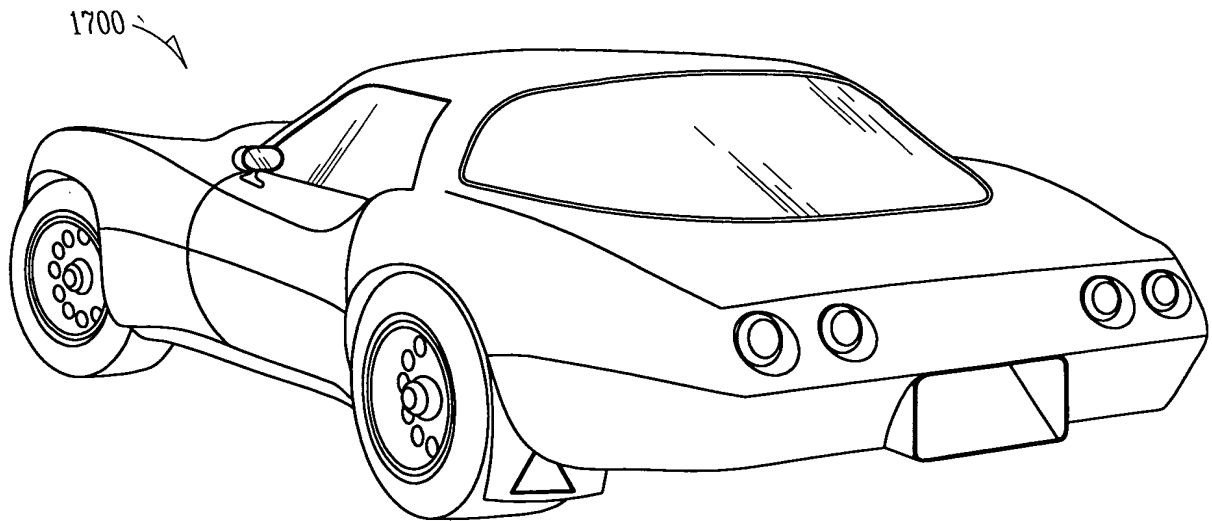


*FIG. 16A*

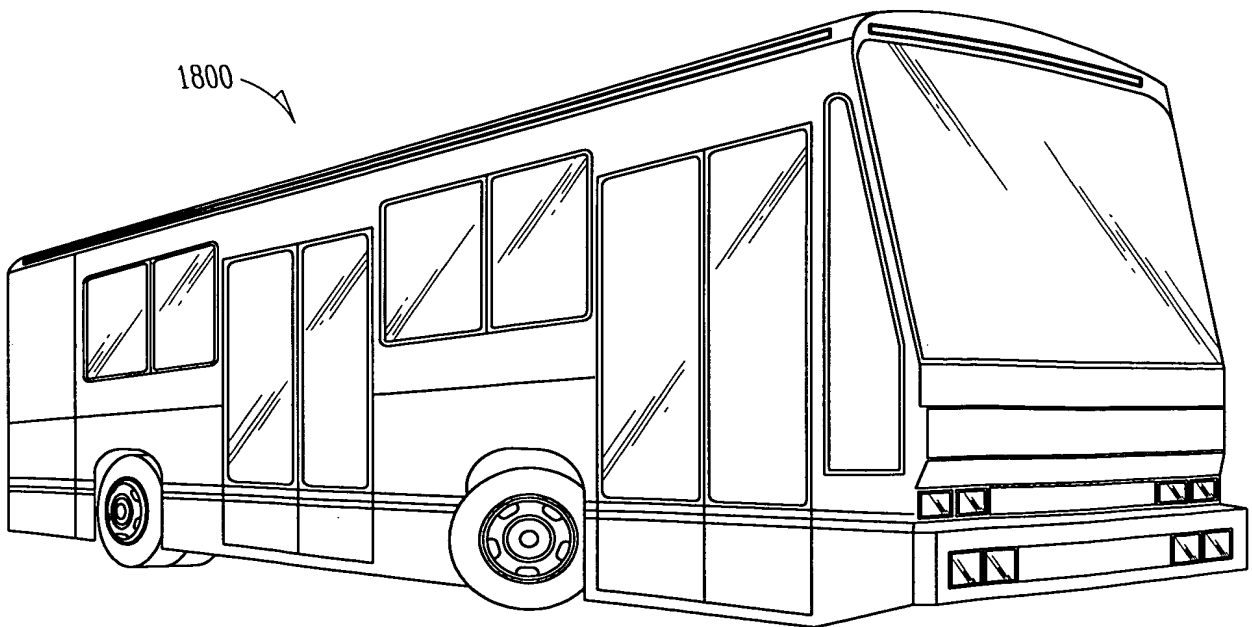


*FIG. 16B*

11/12

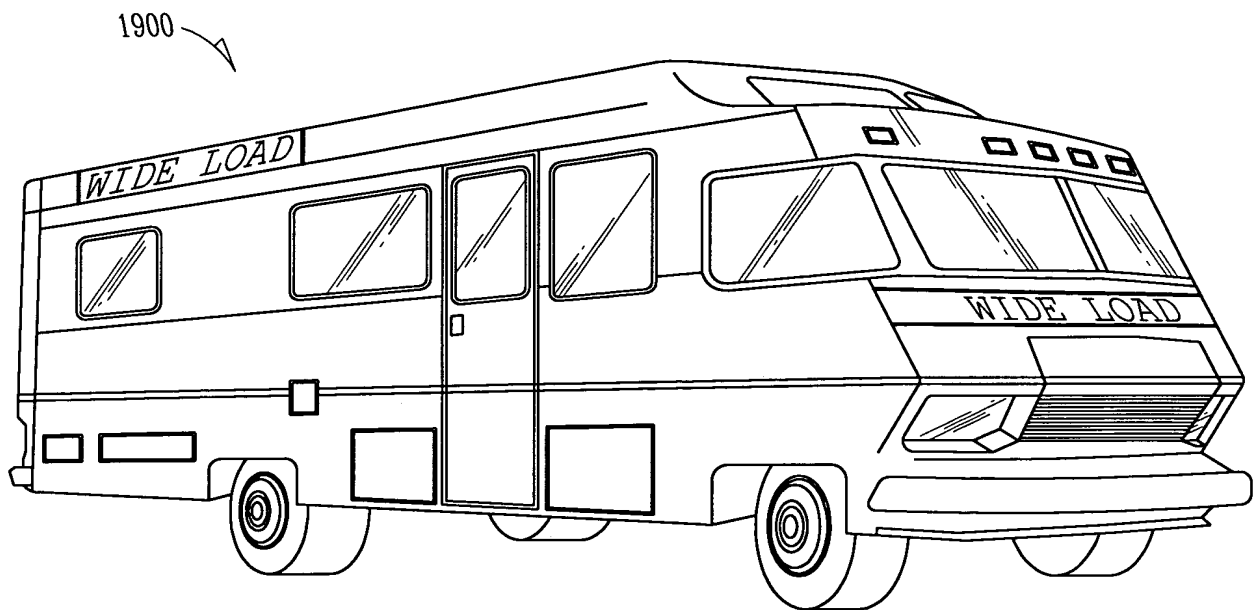


*FIG. 17*



*FIG. 18*

12/12



*FIG. 19*